



#### Table of Contents

1. Introduction	P1
2. DC/DC converter features	P1
3. Electrical block diagram	P2
4. Technical specification	P3
5. Main features and functions	P6
5.1 Operating temperature range	P6
5.2 Output voltage adjustment	P6
5.3 Over current protection	P6
5.4 Output over voltage protection	P6
5.5 Remote On/Off	P6
5.6 UVLO & OVLO (under/over voltage lock out)	P6
5.7 Over temperature range	P6
6. Applications	P6
6.1 Recommended layout, PCB footprint and soldering information	P6
6.2 Convection requirements for cooling	P7
6.3 Thermal considerations	P7
6.4 Input capacitance at the power module	P7
6.5 Power de-rating	P8
6.6 Half brick heat sinks	P9
6.7 Efficiency VS load	P10
6.8 Test set-up	P12
6.9 Output voltage adjustment	P12
6.10 Output remote sensing	P13
6.11 Output ripple and noise	P13
6.12 Output capacitance	P13
7. Safety & EMC	P14
7.1 Input fusing and safety considerations	P14
7.2 EMC considerations	P14
8. Part number	P20
9. Mechanical specifications	P20
9.1 Mechanical outline diagrams	P20

#### 1. Introduction

The PHB75W series offers 75 watts of output power with high power density in an industry standard half- brick package. The PHB75W series has wide (4:1) input voltage ranges of 9-36 and 18-75VDC and provides a precisely regulated output. This series has features such as high efficiency, 1500VDC isolation and a case operating temperature range of -40°C to 100°C. The modules are fully protected against input UVLO (under voltage lock out), output short circuit, output over voltage and over temperature conditions. Furthermore, the standard control functions include remote on/off and output voltage trimming. All models are highly suited to telecommunications, distributed power architectures, battery operated equipment, industrial, and mobile equipment applications.

#### 2. DC/DC Converter Features

49.5-75W isolated output	
4:1 wide input range	
Efficiency (at full load) up to 85%	
Regulated output	
Fixed switching frequency	
Input under voltage lockout protection	
Over current protection	
Remote ON/OFF	
Continuous short circuit protection	
Industry standard half-brick package	
Fully isolated to 1500VDC	

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

### 3. Electrical Block Diagram

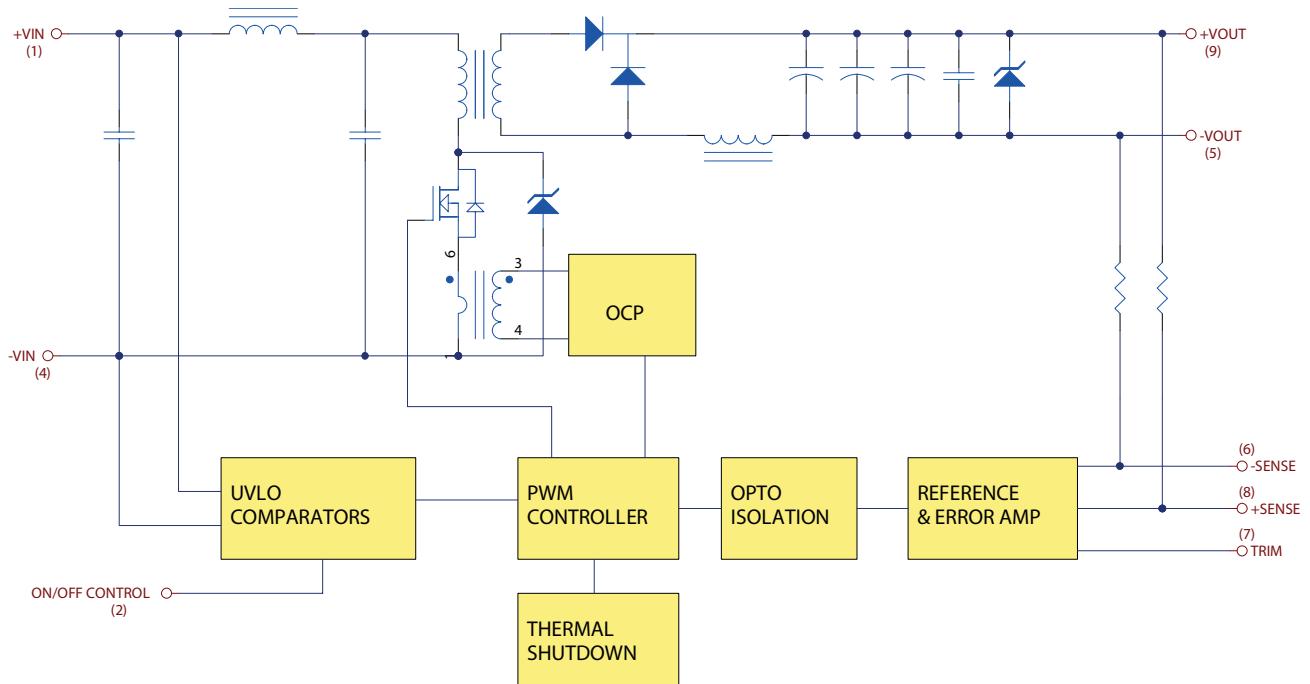


Figure 1 Electrical Block Diagram of PHB75W Others module

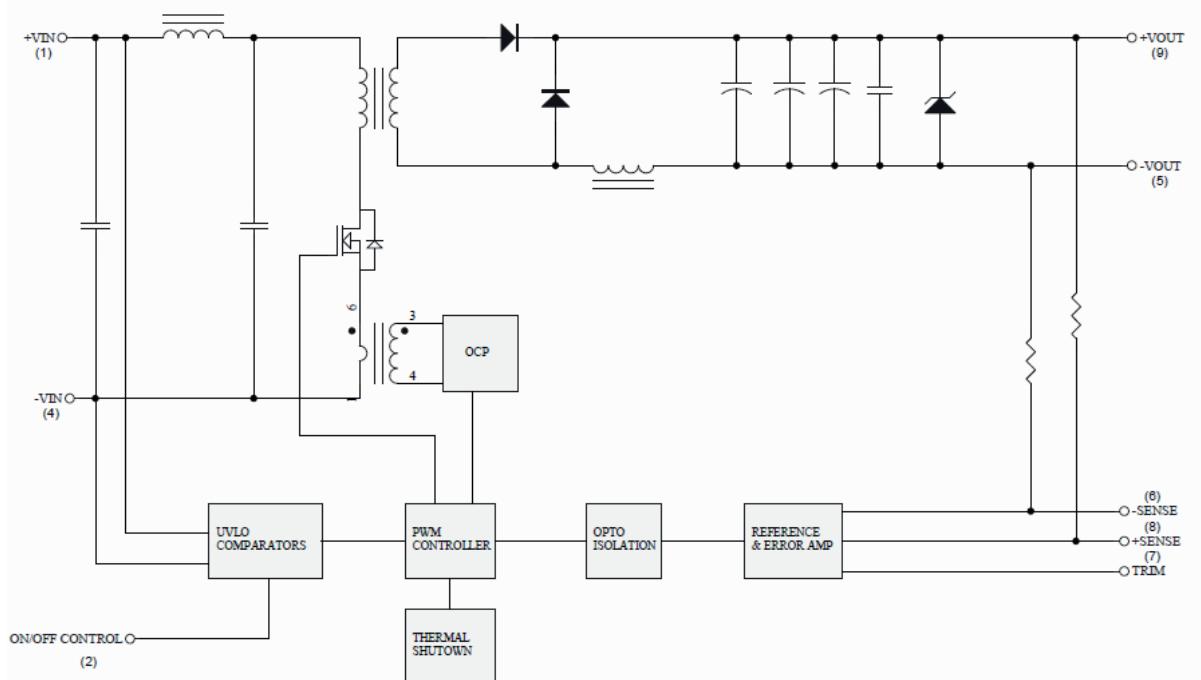


Figure 2 Electrical Block Diagram of PHB75W-XXS48 module

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

#### 4. Technical Specifications

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

##### Absolute Maximum Ratings

Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
<i>Input voltage</i>						
Continuous		24SXX	-0.7		36	VDC
		48SXX	-0.7		75	VDC
Transient	100ms	24SXX			50	VDC
		48SXX			100	VDC
Operating case temperature		All	-40		100	°C
Storage temperature		All	-55		105	°C
Isolation voltage, 1 minute	Input/output, input/case, output/case	All			1500	VDC

##### Input Characteristics

Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
<i>Operating input voltage</i>						
Operating input voltage		24SXX	9	24	36	VDC
		48SXX	18	48	75	VDC
<i>Input Under Voltage Lockout</i>						
Turn-on voltage threshold		24SXX		8.8		VDC
		48SXX		17		VDC
Turn-off voltage threshold		24SXX		8.0		VDC
		48SXX		16		VDC
Lockout hysteresis voltage		24SXX		0.8		VDC
		48SXX		1		VDC
Maximum input current	100% Load, Vin=9V for 24SXX	24SXX		10.3		A
	100% Load, Vin =18V for 48SXX	48SXX		5.1		A
No-load input current		24S33			50	mA
		24S05			50	mA
		24S12			50	mA
		24S15			50	mA
		24S24			50	mA
		24S28			50	mA
		48S33			50	mA
		48S05			50	mA
		48S12			50	mA
		48S15			50	mA
		48S24			50	mA
		48S28			50	mA
		48S48			50	mA
Inrush current ( $I^2t$ )		All			0.1	A <sup>2</sup> s
Input reflected ripple current	P-P thru 12uH inductor, 5Hz to 20Mhz	24SXX		74		mA
		48SXX		30		mA

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

**Output Characteristics**

Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
Output voltage set point	Vin=Nominal Vin, Io = Io_max, Tc=25°C	Vo=3.3 V	3.267	3.3	3.333	VDC
		Vo=5.0 V	4.95	5	5.05	VDC
		Vo=12 V	11.88	12	12.12	VDC
		Vo=15 V	14.85	15	15.15	VDC
		Vo=24 V	23.76	24	24.24	VDC
		Vo=28 V	27.72	28	28.28	
		Vo=48 V	47.52	48	48.48	VDC
<i>Output voltage regulation</i>						
Load regulation	Io=Io_min to Io_max	All		±0.2		%
Line regulation	Vin=low line to high line	All		±0.2		%
Temperature coefficient	TC=-40°C to 100°C	All		±0.03		%/°C
<i>Output voltage ripple and noise</i>						
Peak-to-Peak	5Hz to 20MHz bandwidth, full load, 10uF tantalum and 1.0uF ceramic capacitors	Vo= 3.3V & 5.0V Vo=12V & 15V Vo=24V Vo=28V		100 150 240 280		mV
	5Hz to 20MHz bandwidth, full load 1.0uF ceramic capacitors	Vo=48V		480		mV
RMS	5Hz to 20MHz bandwidth, full load, 10uF solid tantalum and 1.0uF ceramic capacitors	Vo= 3.3V & 5.0V Vo=12V & 15V Vo=24V & 28V		40 60 100		mV
	Full load 1.0uF ceramic capacitor	Vo=48V		200		mV
Operating output current range		Vo=3.3 V Vo=5.0 V Vo=12 V Vo=15 V Vo=24 V Vo=28 V Vo=48 V	0 0 0 0 0 0 0	15 15 6.25 5 3.12 2.67 1.56		A
Output DC current limit inception	Output voltage=90% ,nom output voltage	All	110		160	%
Maximum output capacitance	Full load (resistive)	Vo=3.3 V Vo=5.0 V Vo=12 V Vo=15 V Vo=24 V Vo=28 V Vo=48 V	0 0 0 0 0 0 0	15000 15000 6250 5000 3120 2670 1560		uF

**Dynamic Characteristics**

Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
<i>Output voltage current transient</i>						
Step change in output current	75% to 100% of Io,max	All		±5		%
Setting time (within 1% Vout nominal)di/dt=0.1A/us		All		500		us
<i>Turn-on delay and rise time</i>						
Turn-on delay time, from On/Off control	Von/off to 10%Vo_set	All		3		ms
Turn-on delay time, from input	Vin_min to 10%Vo_set	All		3		ms
Output voltage rise time	10%Vo_set to 90%Vo_set	All		1		ms

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

Efficiency						
Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
100% load		24S33	79			%
		24S05	82			%
		24S12	83			%
		24S15	84			%
		24S24	84			%
		24S28	84			%
		24S48	82			%
		48S33	80			%
		48S05	83			%
		48S12	84			%
		48S15	85			%
		48S24	85			%
		48S28	85			%
		48S48	84			%

Isolation Characteristics						
Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
Isolation voltage, 1 minute	input/output, input/case, output/case	All			1500	VDC
Isolation resistance		All	10			MΩ
Isolation capacitance	Input to output	All		1000		pF

Feature Characteristics						
Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
Switching frequency		All		300		KHz
<i>ON/OFF control, positive remote On/Off logic</i>						
Logic low (module off)	Von/off at I <sub>on/off</sub> =1.0mA	All			0.8	V
Logic high (module on)	Von/off at I <sub>on/off</sub> =0.0uA	All	3.5 or open circuit		75	V
<i>ON/OFF control, negative remote On/Off logic</i>						
Logic high (module off)	Von/off at I <sub>on/off</sub> =0.0uA	All	3.5 or Open Circuit		75	V
Logic high (module on)	Von/off at I <sub>on/off</sub> =1.0mA	All			0.8	V
Off converter input current	Shutdown input idle current	All			10	mA
Output voltage trim range	P <sub>out</sub> =max rated power	All	-10		+10	%
Output over voltage protection	With TVS clamp	All	115	125	140	%
Over-temperature shutdown	Shutdown Case Temperature	All		100		°C
	Restart threshold Case Temperature	All		70		°C

General Specifications						
Parameters	Notes and Conditions	Device	Min	Typical	Max	Units
MTBF	I <sub>o</sub> =100% of I <sub>o_max</sub> : Ta=25°C per MIL-HDBK-217F	All		1		Mhours
Weight		All		94		grams

## 5. Main Features and Functions

### 5.1 Operating Temperature Range

The PHB75W series converters can be operated within a wide case temperature range of -40°C to 100°C. Consideration must be given to the derating curves when ascertaining maximum power that can be drawn from the converter. The maximum power drawn from half brick models is influenced by usual factors, such as:

- Input voltage range
- Output load current
- Forced air or natural convection

### 5.2 Output Voltage Adjustment

Section 6.8 describes in detail how to trim the output voltage with respect to its set point. The output voltage on all models is adjustable within the range of +10% to -10%.

### 5.3 Over Current Protection


All models have internal over current and continuous short circuit protection. The unit operates normally once the fault condition is removed. At the point of current limit inception, the output voltage of converter will be going down into current limit and power fold-back protection.

### 5.4 Output Over Voltage Protection

The output terminals connect a TVS (Transient Voltage Suppressor) diode. The TVS is used by the function of output over voltage protection to avoid the output voltage increase too high in abnormal condition. If more accurate output over voltage protection is required then an external circuit can be used via the remote on/off pin.

### 5.5 Remote On/Off

The PHB75W series allows the user to switch the module on and off electronically with the remote on/off feature. All models are available in "positive logic" and "negative logic" (optional) versions. The converter turns on if the remote On/Off pin is high (>3.5Vdc or open circuit). Setting the pin low (<0.8Vdc) will turn the converter off. The signal level of the remote on/off input is defined with respect to ground. If not using the remote on/off pin, leave the pin open (converter will be on). Models with part number suffix "N" are the "negative logic" remote On/Off version. The unit turns off if the remote On/Off pin is high (>3.5Vdc or open circuit). The converter turns on if the On/Off pin input is low (<0.8Vdc). Note that the converter is off by default.

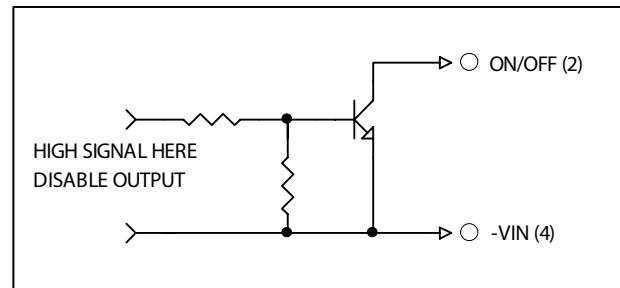

### 5.6 UVLO&OVLO (Under/Over Voltage Lock Out)

Input under voltage lockout is standard on the PHB75W unit. The unit will shut down when the input voltage drops below a threshold, and the unit will operate when the input voltage goes above the upper threshold.


### 5.7 Over Temperature Protection


These modules have an over temperature protection circuit to safeguard against thermal damage. The module shuts down and latches off when the maximum case reference temperature is exceeded. The module will restart when the case temperature falls below restart threshold.

## 6. Applications

### 6.1 Recommended Layout, PCB Footprint and Soldering Information

The system designer or end user must ensure that metal and other components in the vicinity of the converter meet the spacing requirements for which the system is approved. Low resistance and inductance PCB layout traces are the norm and should be used where possible. Due consideration must also be given to proper low impedance tracks between power module, input and output grounds. The recommended soldering profile and PCB layout are shown below.

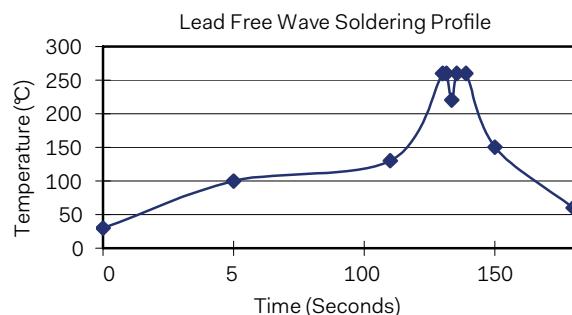

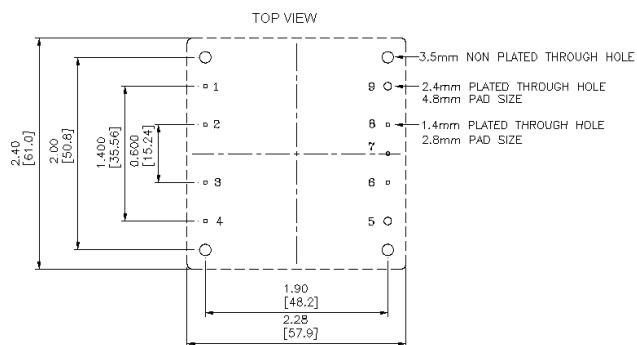

## 6.2 Convection Requirements for Cooling


To predict the approximate cooling needed for the half brick module, refer to the power derating curves in section 6.4. These derating curves are approximations of the ambient temperatures and airflows required to keep the power module temperature below its maximum rating. Once the module is assembled in the actual system, the module's temperature should be monitored to ensure it does not exceed 100°C as measured at the center of the top of the case (thus verifying proper cooling).

## 6.3 Thermal Considerations

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. The example is presented in section 6.4. The power output of the module should not be allowed to exceed rated power ( $V_o_{set} \times I_{o\_max}$ ).

## 6.4 Input Capacitance at the Power Module

The converters must be connected to low AC source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors ( $C_{in}$ ) should be placed close to the converter input pins to de-couple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR capacitors are good choice. Circuit as shown as below represents typical measurement methods for reflected ripple current.  $C_1$  and  $L_1$  simulate a typical DC source impedance. The input reflected-ripple current is measured by current probe to oscilloscope with a simulated source inductance ( $L_1$ ).

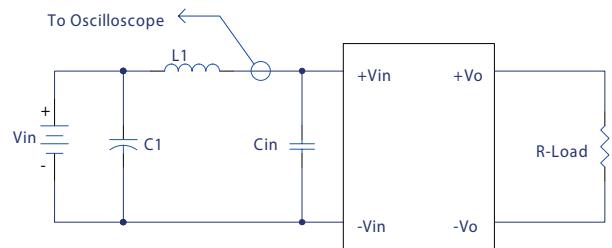

$L_1: 12\mu H$

$C_1: 220\mu F$  ESR<0.1ohm @100KHz

$C_{in}: 100\mu F$  ESR<0.1ohm @100KHz

Input Reflected-Ripple Test Setup

**POWERBOX Industrial Line**  
**PHB75W Series**  
**49.5-75W 4:1 Single Output**  
**DC/DC Converter**  
**Manual V13**

## 6.5 Power De-rating

The operating case temperature range of PHB75W series is -40°C to +100°C. When operating the PHB75W series, proper de-rating or cooling is needed. The maximum case temperature under any operating condition should not be exceeded 100°C.

### Example

What is the minimum airflow necessary for a PHB75W-24S12 operating at nominal line voltage, an output current of 6.25A, and a maximum ambient temperature of 40°C?

Solution:

$$\text{Given: } V_{in}=24\text{Vdc } V_o=12\text{Vdc } I_o=6.25\text{A}$$

Determine power dissipation ( $P_d$ ):

$$P_d = P_i - P_o = P_o(1-\eta)/\eta$$

$$P_d = 12 \times 6.25 \times (1-0.83)/0.83 = 15.36 \text{ Watts}$$

Determine airflow:

$$\text{Given: } P_d = 15.36 \text{ W and } T_a = 40^\circ\text{C}$$

Check above power de-rating curve:

$$\text{Minimum airflow} = 400 \text{ ft./min.}$$

Verifying:

The maximum temperature rise:

$$\Delta T = P_d \times R_{ca} = 15.36 \text{ W} \times 3.64 = 55.9^\circ\text{C}$$

The maximum case temperature:

$$T_c = T_a + \Delta T = 95.9^\circ\text{C} < 100^\circ\text{C}$$

Where:

The  $R_{ca}$  is thermal resistance from case to ambience.

The  $T_a$  is ambient temperature and the  $T_c$  is case temperature.

### Example (with heatsink M-C092):

What is the minimum airflow necessary for a PHB75W-48S05 operating at nominal line voltage, an output current of 15A, and a maximum ambient temperature of 40°C?

Solution:

$$\text{Given: } V_{in}=24\text{Vdc, } V_o=5\text{Vdc, } I_o=15\text{A}$$

Determine Power dissipation ( $P_d$ ):

$$P_d = P_i - P_o = P_o(1-\eta)/\eta$$

$$P_d = 5 \times 15 \times (1-0.83)/0.83 = 15.36 \text{ Watts}$$

Determine airflow:

$$\text{Given: } P_d = 11.73 \text{ W and } T_a = 40^\circ\text{C}$$

Check above Power de-rating curve:

$$P_d < 20 \text{ W, Natural Convection}$$

Verifying:



The maximum temperature rise  $\Delta T = P_d \times R_{ca} = 15.36 \times 3 = 46.1^\circ\text{C}$

The maximum case temperature  $T_c = T_a + \Delta T = 86.1^\circ\text{C} < 100^\circ\text{C}$

Where:

The  $R_{ca}$  is thermal resistance from case to ambient environment.

The  $T_a$  is ambient temperature and the  $T_c$  is case temperature.

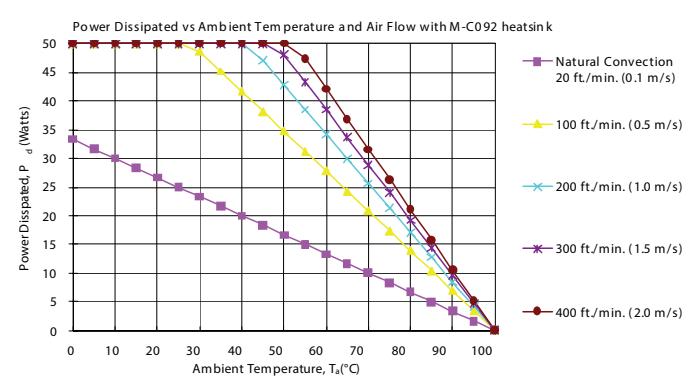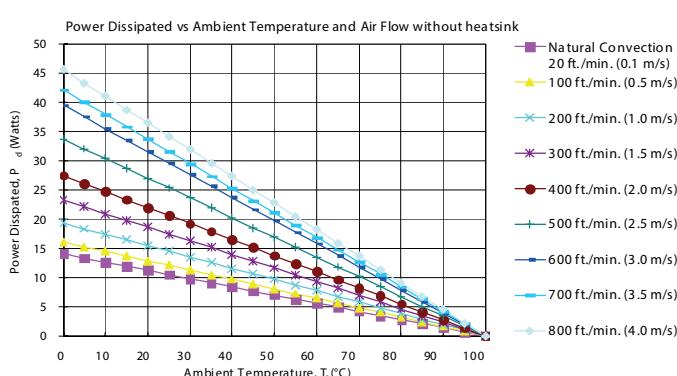


AIR FLOW RATE	TYPICAL $R_{ca}$
Natural Convection 20ft./min. (0.1m/s)	7.12°C/W
100 ft./min. (0.5m/s)	6.21°C/W
200 ft./min. (1.0m/s)	5.17°C/W
300 ft./min. (1.5m/s)	4.29°C/W
400 ft./min. (2.0m/s)	3.64°C/W
500 ft./min. (2.5m/s)	2.96°C/W
600 ft./min. (3.0m/s)	2.53°C/W
700 ft./min. (3.5m/s)	2.37°C/W
800 ft./min. (4.0m/s)	2.19°C/W

AIR FLOW RATE	TYPICAL $R_{ca}$
Natural Convection 20ft./min. (0.1m/s)	3°C/W
100 ft./min. (0.5m/s)	1.44°C/W
200 ft./min. (1.0m/s)	1.17°C/W
300 ft./min. (1.5m/s)	1.04°C/W
400 ft./min. (2.0m/s)	0.95°C/W

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13



## 6.6 Half Brick Heat Sinks



M-C308 (G6620400201)  
 Longitudinal Heat Sink

Rca:



3.90°C/W (typ.), natural convection  
 1.74°C/W (typ.), at 100LFM  
 1.33°C/W (typ.), at 200LFM  
 1.12°C/W (typ.), at 300LFM  
 0.97°C/W (typ.), at 400LFM

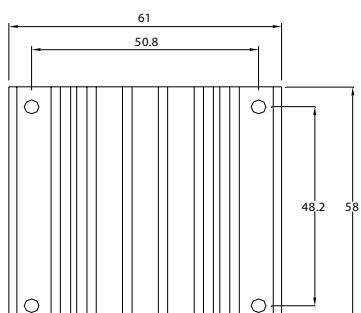

M-C091 (G6610120402)  
 Transverse Heat Sink

Rca:


4.70°C/W (typ.), natural convection  
 2.89°C/W (typ.), at 100LFM  
 2.30°C/W (typ.), at 200LFM  
 1.88°C/W (typ.), at 300LFM  
 1.59°C/W (typ.), at 400LFM

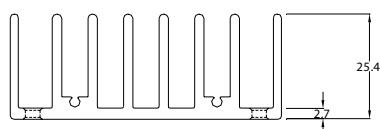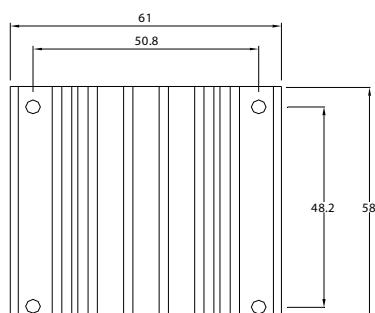

M-C092 (G6610130402)  
 Transverse Heat Sink

Rca:

3.00°C/W (typ.), natural convection  
 1.44°C/W (typ.), at 100LFM  
 1.17°C/W (typ.), at 200LFM  
 1.04°C/W (typ.), at 300LFM  
 0.95°C/W (typ.), at 400LFM

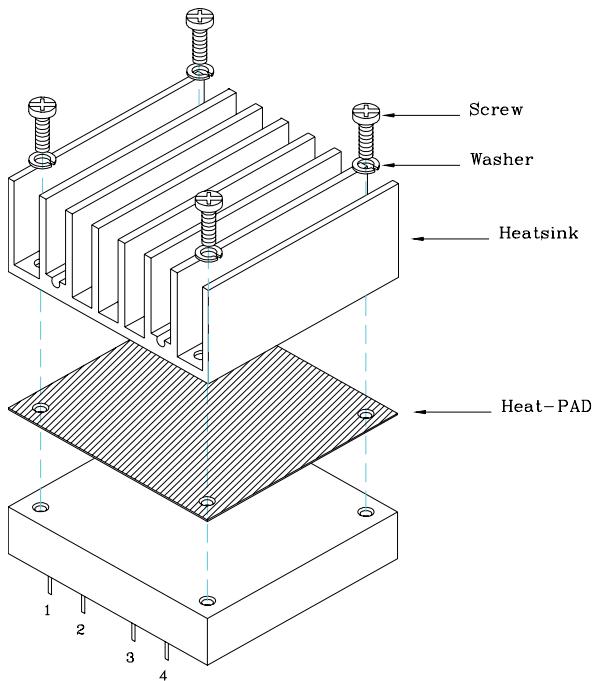


THERMAL PAD: SZ 56.9\*60\*0.25 mm (G6135041091)  
 SCREW: SMP+SW M3\*8L (G75A1300322)


POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

## 6.7 Efficiency VS. Load


PHB75W-24S3V3 Efficiency VS.Load

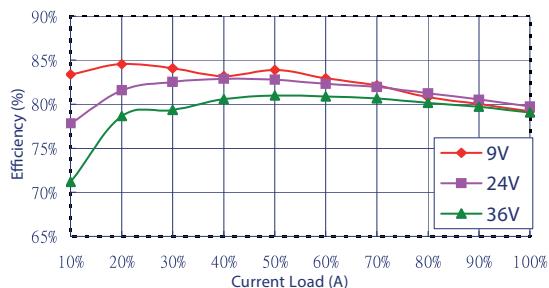


PHB75W-24S05 Efficiency VS.Load

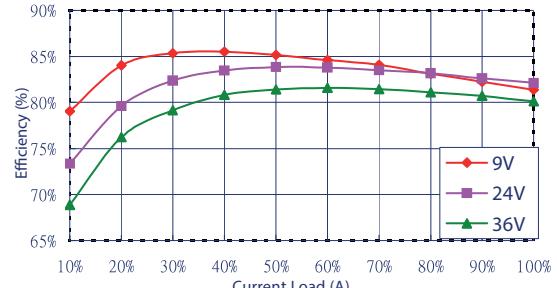


PHB75W-24S12 Efficiency VS.Load

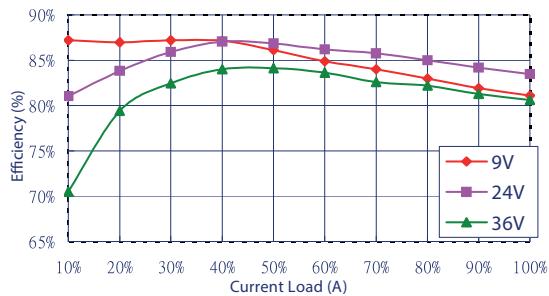


PHB75W-24S15 Efficiency VS.Load

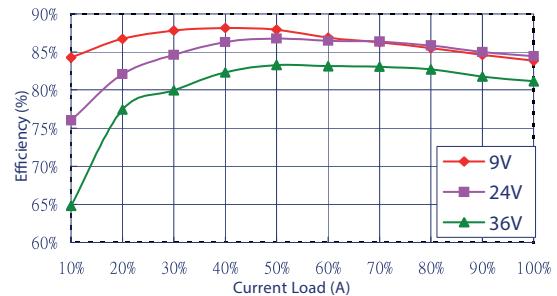

PHB75W-24S24 Efficiency VS.Load

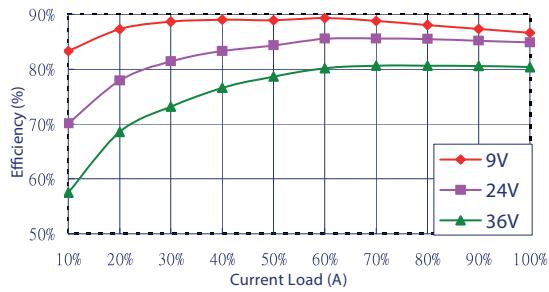


PHB75W-24S28 Efficiency VS.Load

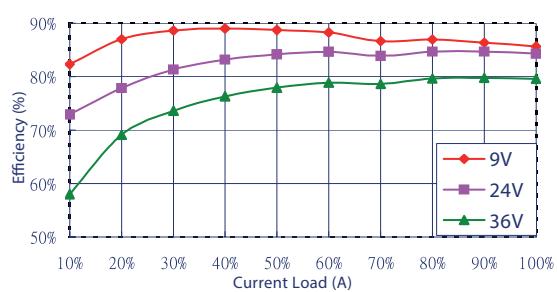


POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13


PHB75W-24S48 Efficiency VS.Load

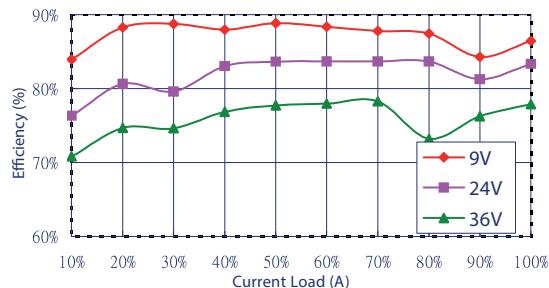


PHB75W-48S3V3 Efficiency VS.Load

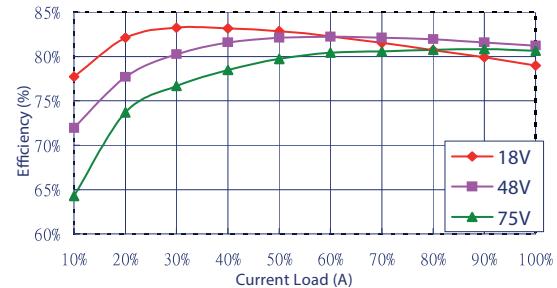


PHB75W-48S05 Efficiency VS.Load

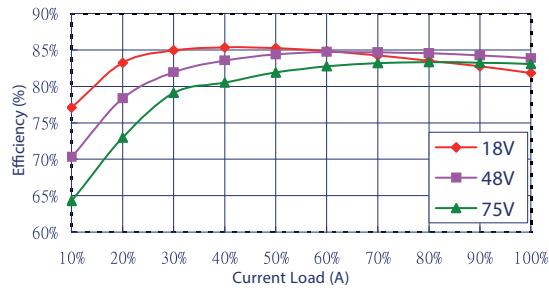


PHB75W-48S12 Efficiency VS.Load

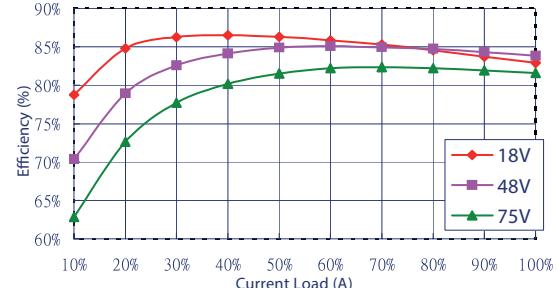


PHB75W-48S15 Efficiency VS.Load

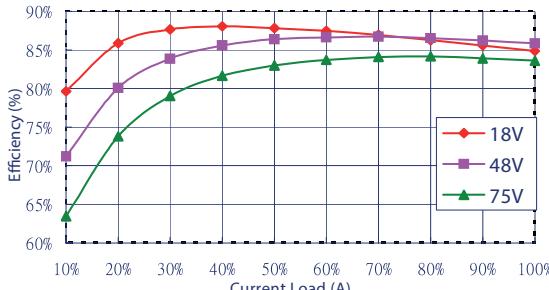


PHB75W-48S24 Efficiency VS.Load

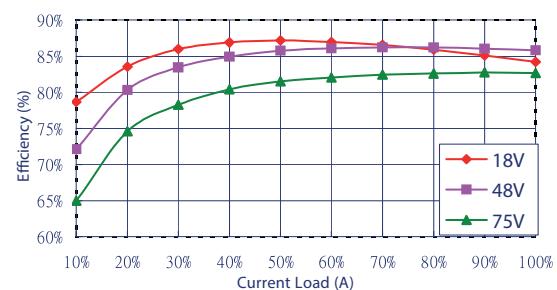

PHB75W-48S28 Efficiency VS.Load

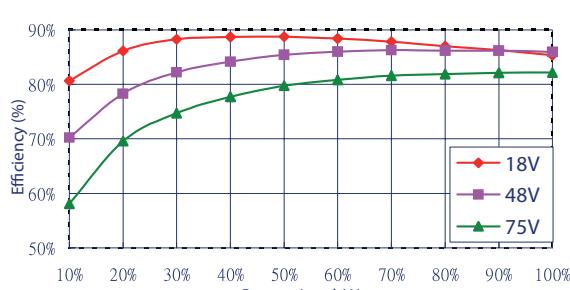

PHB75W-48S48 Efficiency VS.Load

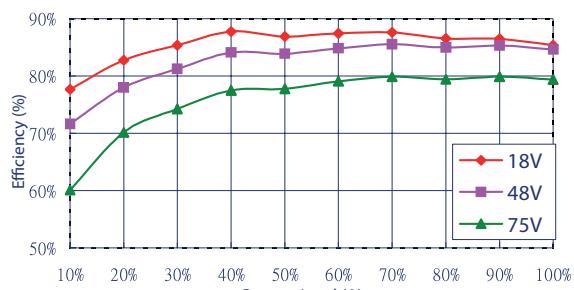

## 6.8 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown below. When testing the modules under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate:

- Efficiency
- Load regulation and line regulation.

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Where:

$V_o$  is output voltage,  
 $I_o$  is output current,  
 $V_{in}$  is input voltage,  
 $I_{in}$  is input current.

The value of load regulation is defined as:

$$Load.reg = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:


$V_{FL}$  is the output voltage at full load  
 $V_{NL}$  is the output voltage at no load

The value of line regulation is defined as:

$$Line.reg = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:  $V_{HL}$  is the output voltage of maximum input voltage at full load.

$V_{LL}$  is the output voltage of minimum input voltage at full load.


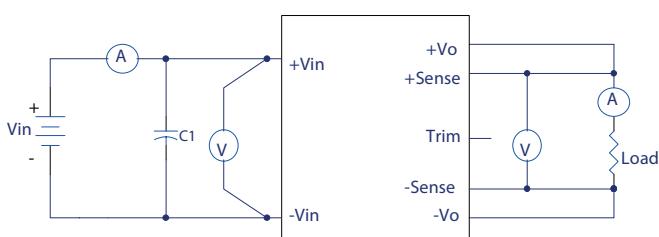


C1: for 24Vin Models 100uF Aluminum Capacitor.  
 for 48Vin Models 47uF Aluminum Capacitor.

PHB75W Series Test Setup

## 6.9 Output Voltage Adjustment

In order to trim the voltage up or down, one needs to connect the trim resistor either between the trim pin and -Vo for trim-up or between trim pin and +Vo for trim-down. The output voltage trim range is  $\pm 10\%$ . This is shown:

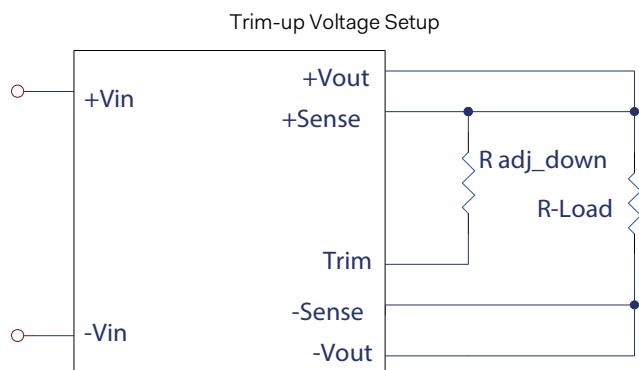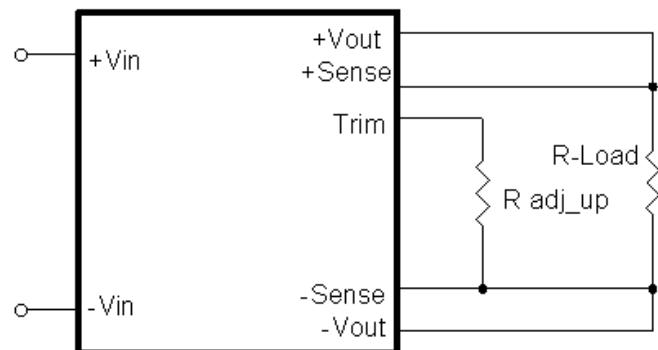

Vout (V)	R1 (KΩ)	R2 (KΩ)	R3 (KΩ)	Vr (V)	Vf (V)
3.3V	3.0	12	18	1.24	0.46
5V	2.32	8.2	0	2.5	0
12V	9.1	51	18	2.5	0.46
15V	12	82	18	2.5	0.46
24V	20	100	20	2.5	0.46
28V	23.7	150	16	2.5	0.46
48V	36	270	14	2.5	0.46

Table of trim resistor values

# POWERBOX Industrial Line

PHB75W Series

49.5-75W 4:1 Single Output

DC/DC Converter

Manual V13

The value of R<sub>adj\_up</sub> defined as:

$$R_{adj\_up} = \left( \frac{R_1(V_r - V_f) \left( \frac{R_2}{R_2 + R_3} \right)}{V_o - V_{o\_nom}} \right) - \frac{R_2 R_3}{R_2 + R_3} \text{ (K}\Omega\text{)}$$

Where:

R<sub>adj\_up</sub> is the external resistor in KΩ.

V<sub>o\_nom</sub> is the nominal output voltage.

V<sub>o</sub> is the desired output voltage.

R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> and V<sub>r</sub> are internal components and are defined in the table of trim resistor values

For example, to trim-up the output voltage of 12V module (PHB75W-24S12) by 5% to 12.6V, R<sub>adj\_up</sub> is calculated as follows:

$$V_o - V_{o\_nom} = 12.6 - 12 = 0.6V$$

$$R_1 = 9.1 \text{ K}\Omega, R_2 = 51 \text{ K}\Omega, R_3 = 18 \text{ K}\Omega,$$

$$V_r = 2.5 \text{ V}, V_f = 0.46 \text{ V}$$

$$R_{adj\_up} = \frac{19.656}{0.6} - 13.3 = 19.46 \text{ (K}\Omega\text{)}$$

The value of R<sub>adj\_down</sub> defined as:

$$R_{adj\_down} = \frac{R_1 \times (V_o - V_r)}{V_{o\_nom} - V_o} - R_2 \text{ (K}\Omega\text{)}$$

Where:

R<sub>adj\_down</sub> is the external resistor in KΩ.

V<sub>o\_nom</sub> is the nominal output voltage.

V<sub>o</sub> is the desired output voltage.

R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> and V<sub>r</sub> are internal components

For example: to trim-down the output voltage of 12V module (PHB75W-24S12) by 5% to 11.4V, R<sub>adj\_down</sub> is calculated as follows:

$$V_{o\_nom} - V_o = 12 - 11.4 = 0.6 \text{ V}$$

$$R_1 = 9.1 \text{ K}\Omega, R_2 = 51 \text{ K}\Omega, V_r = 2.5 \text{ V}$$

$$R_{adj\_down} = \frac{9.1 \times (11.4 - 2.5)}{0.6} - 51 = 83.98 \text{ (K}\Omega\text{)}$$


## 6.10 Output Remote Sensing

The PHB75W SERIES converter has the capability to remotely sense both lines of its output. This feature moves the effective output voltage regulation point from the output of the unit to the point of connection of the remote sense pins. This feature automatically adjusts the real output voltage of the PHB75W series in order to compensate for voltage drops in distribution and maintain a regulated voltage at the point of load. The remote-sense voltage range is:

$$[(+V_{out}) - (-V_{out})] - [(+Sense) - (-Sense)] \leq 10\% \text{ of } V_{o\_nominal}$$


If the remote sense feature is not to be used, the sense pins should be connected locally. The +Sense pin should be connected to the +V<sub>out</sub> pin at the module and the -Sense pin should be connected to the -V<sub>out</sub> pin at the module.

This is shown in the schematic below.

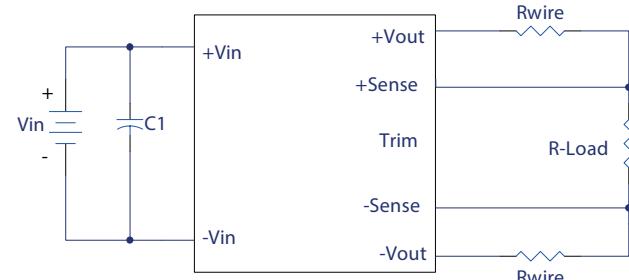

Note: Although the output voltage can be varied (increased or decreased) by both remote sense and trim, the maximum variation for the output voltage is the larger of the two values not the sum of the values. The output power delivered by the module is defined as the voltage at the output terminals multiplied by the output current. Using remote sense and trim can cause the output voltage to increase and consequently increase the power output of the module if output current remains unchanged. Always ensure that the output power of the module remains at or below the maximum rated power. Also be aware that if V<sub>o.set</sub> is below nominal value, P<sub>out.max</sub> will also decrease accordingly because I<sub>o.max</sub> is an absolute limit. Thus, P<sub>out.max</sub> = V<sub>o.set</sub> x I<sub>o.max</sub> is also an absolute limit.

## 6.11 Output Ripple and Noise

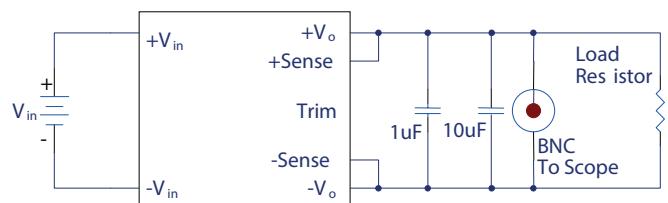

Output ripple and noise is measured with 1.0uF ceramic and 10uF solid tantalum capacitors across the output. (48V: 1uF ceramic capacitors only).


## 6.12 Output Capacitance

The PHB75W series converters provide unconditional stability with or without external capacitors. For good transient response, low ESR output capacitors should be located close to the point of load. PCB design emphasizes low resistance and inductance tracks in consideration of high current applications. Output capacitors with their associated ESR values have an impact on loop stability and bandwidth. Powerbox converters are designed to work with load capacitance to see technical specifications.

## 7. Safety & EMC

### 7.1 Input Fusing and Safety Consideration


The PHB75W series converters have no internal fuse. In order to achieve maximum safety and system protection, always use an input line fuse. We recommended a 15A time delay fuse for 24Vin models, and 8A for 48Vin models. It is recommended that the circuit have a transient voltage suppressor diode (TVS) across the input terminal to protect the unit against surge or spike voltage and input reverse voltage (as shown).

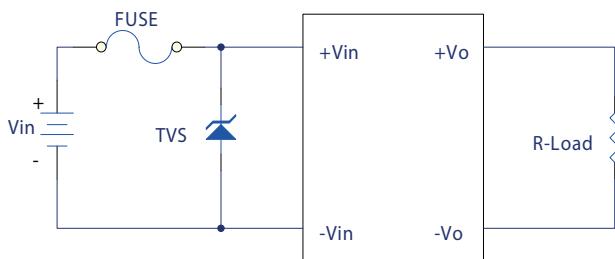

### 7.2 EMC Considerations

Suggested Circuits for Conducted EMI CLASS A & Class B

(1) EMI and conducted noise meet EN55022 Class A specifications:

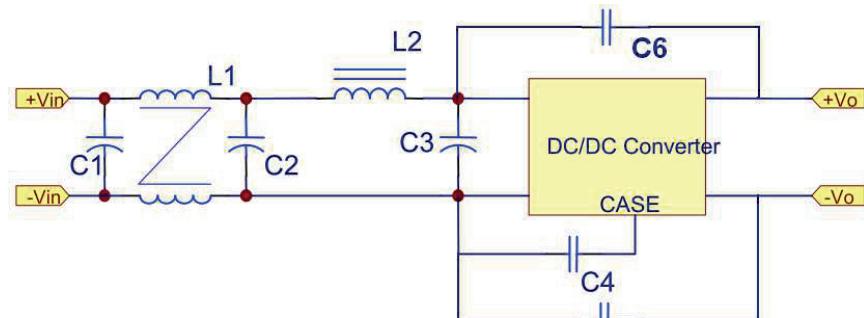


Model No.	C1	C2	C3	C4	C5	C6	L1	L2
PHB75W-24S33	NC	47uF/50V	47uF/50V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-24S05	NC	47uF/50V	47uF/50V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-24S12	NC	47uF/50V	47uF/50V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-24S15	NC	47uF/50V	47uF/50V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-24S24	NC	100uF/50V	100uF/50V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-24S28	NC	100uF/50V	100uF/50V	NC	2200pF/2KV	2200pF/2KV	Short	3.4uH
PHB75W-48S33	NC	47uF/100V	47uF/100V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-48S05	NC	47uF/100V	47uF/100V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-48S12	NC	47uF/100V	47uF/100V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-48S15	NC	47uF/100V	47uF/100V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-48S24	NC	47uF/100V	47uF/100V	2200pF/2KV	NC	NC	Short	3.4uH
PHB75W-48S28	NC	47uF/100V	47uF/100V	470pF/2KV	2200pF/2KV	2200pF/2KV	Short	3.4uH
					1000pF/2KV			

Note: Others models C2, C3, C4 NIPPON CHEMI-CON KMF series aluminum capacitors, 28 Vout models C2, C3 NIPPON CHEMI-CON KY series aluminum capacitors. C4, C5, C6 is ceramic capacitors.

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13


(2) EMI and conducted noise meet EN55022 Class A specifications:

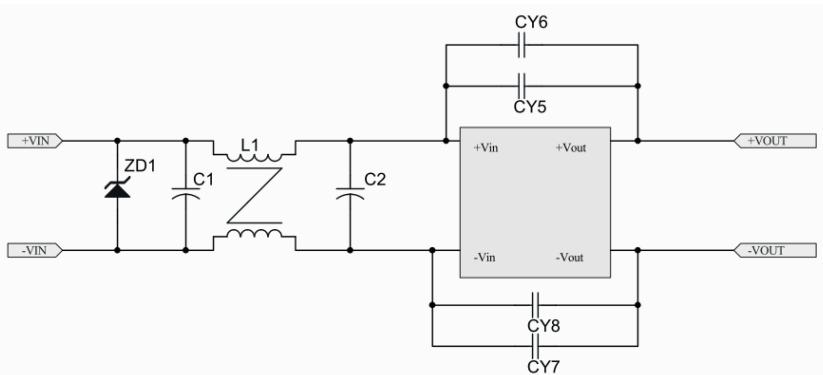

Model No.	C1	C2	CY5	CY6	CY7	CY8	L1
PHB75W-24S48	220uF/50V	100uF/50V	1000pF/2KV	1000pF/2KV	NC	NC	0.223mH
PHB75W-48S48	56uF/100V	39uF/100V	1000pF/2KV	470pF/2KV	NC	NC	0.223mH

Note: 220uF/50V, 39uF/100V NIPPON CHEMI-CON KY series, 56uF/100V NIPPON CHEMI-CON KZE series, 100uF/50V NIPPON CHEMI-CON KMF series aluminum capacitors, CY5, CY6 is ceramic capacitors.

(3) EMI and conducted noise meet EN55022 Class B specifications:

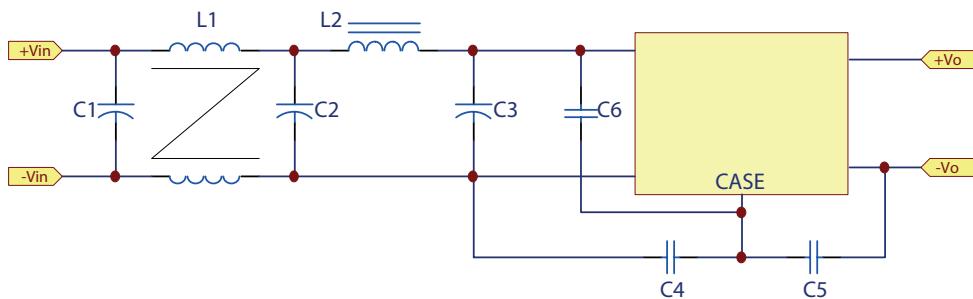

Model No.	C1	C2	C3	C4	C5	C6	L1	L2
PHB75W-24S33	47uF/50V	47uF/50V	47uF/50V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-24S05	47uF/50V	47uF/50V	47uF/50V	2200pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-24S12	47uF/50V	47uF/50V	47uF/50V	3300pF/2KV	1000pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-24S15	47uF/50V	47uF/50V	47uF/50V	2200pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-48S33	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-48S05	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-48S12	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-48S15	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
PHB75W-48S24	47uF/100V	47uF/100V	47uF/100V	2200pF/2KV	2200pF/2KV	1000pF/2KV	1.5mH	3.4uH

Note: 47uF/50V, 47uF/100V NIPPON CHEMI-CON KMF series aluminum capacitors, C4, C5, C6 is ceramic capacitors.

POWERBOX Industrial Line


PHB75W Series

49.5-75W 4:1 Single Output

DC/DC Converter

Manual V13


(4) EMI and conducted noise meet EN55022 Class B specifications:

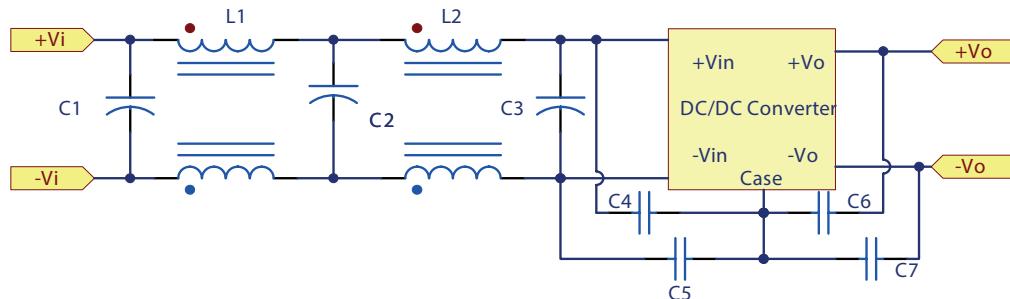

Model No.	C1	C2	C3	C4	C5	C6	C7	L1	L2
PHB75W-24S24	100uF/50V	100uF/50V	NC	1000pF/2KV	1000pF/2KV	1000pF/2KV	1000pF/2KV	0.12mH	0.34mH

Note: 100uF/50V, NIPPON CHEMI-CON KY series aluminum capacitors, C4, C5, C6, C7 is ceramic capacitors.


(5) EMI and conducted noise meet EN55022 Class B specifications:

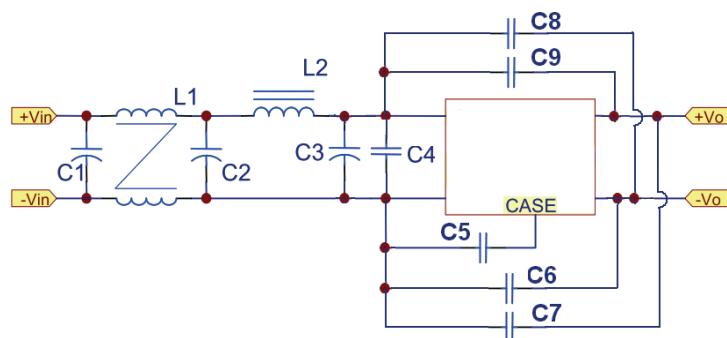

Model No.	C1	C2	C3	C4	C5	C6	C7	C8	C9	L1	L2
PHB75W-24S28	100uF/50V	100uF/50V	100uF/50V	10uF/50V	1000pF/2KV	2200pF/2KV*4	NC	4700pF/2KV	2200pF/2KV*3	1mH	3.4uH
PHB75W-48S28	15uF/100V	15uF/100V	15uF/100V	10uF/100V	1000pF/2KV	2200pF/2KV*4	NC	4700pF/2KV	2200pF/2KV*3	1mH	3.4uH

Note: C1, C2, C3 NIPPON CHEMI-CON KY series aluminum capacitors, C4, C5, C6, C8, C9 is ceramic capacitors.


(6) EMI and conducted noise meet EN55022 Class B specifications:

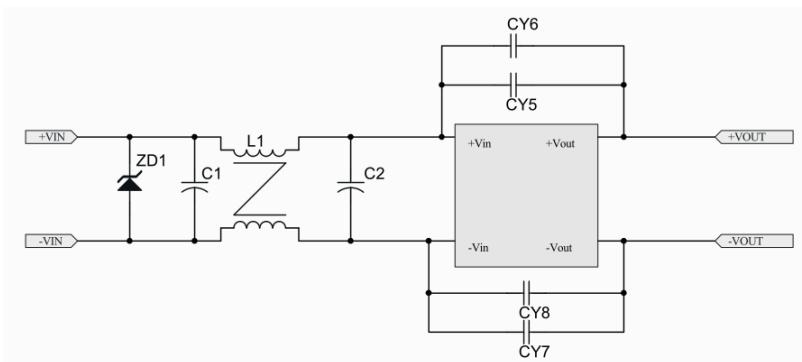


Model No.	C1	C2	CY5	CY6	CY7	CY8	L1
PHB75W-24S48	220uF/50V	220uF/50V	1500pF/2KV	1000pF/2KV	1000pF/2KV	1000pF/2KV	0.223mH
PHB75W-48S48	56uF/100V	56uF/100V	1000pF/2KV	1000pF/2KV	1000pF/2KV	1000pF/2KV	0.223mH

Note: 220uF/50V NIPPON CHEMI-CON KY series, 56uF/100V NIPPON CHEMI-CON KZE series aluminum capacitors, CY5, CY6, CY7, CY8 is ceramic capacitors.


**POWERBOX Industrial Line**  
**PHB75W Series**  
**49.5-75W 4:1 Single Output**  
**DC/DC Converter**  
**Manual V13**

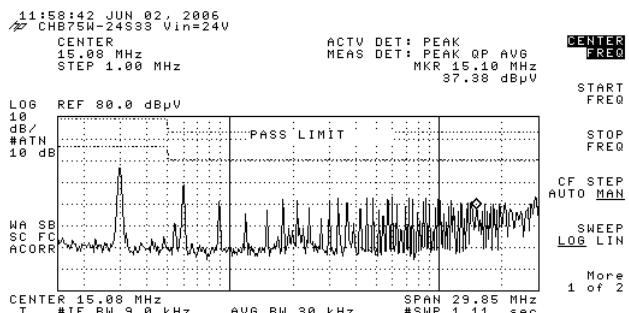


Conducted Class A of PHB75W-24S33

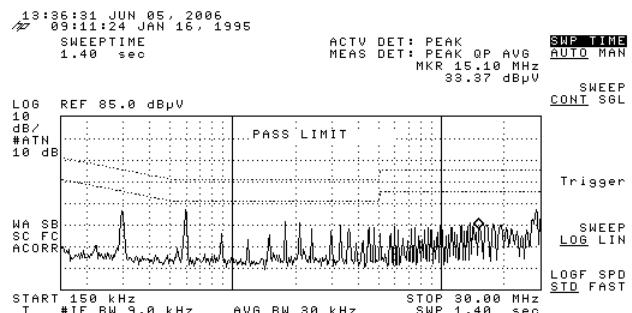


Conducted Class B of PHB75W-24S33

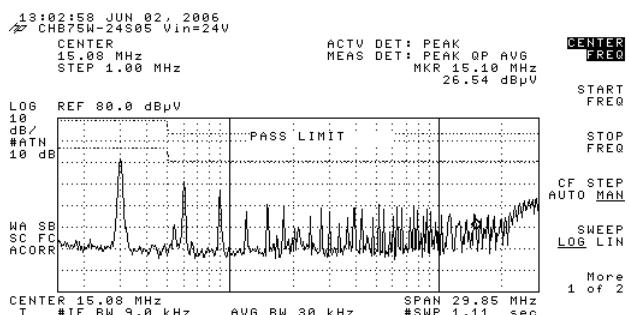


Conducted Class A of PHB75W-24S05

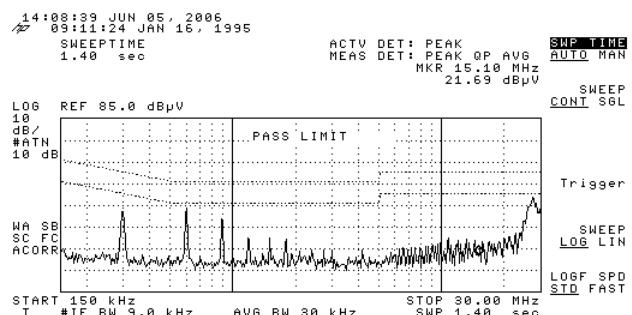


Conducted Class B of PHB75W-24S05

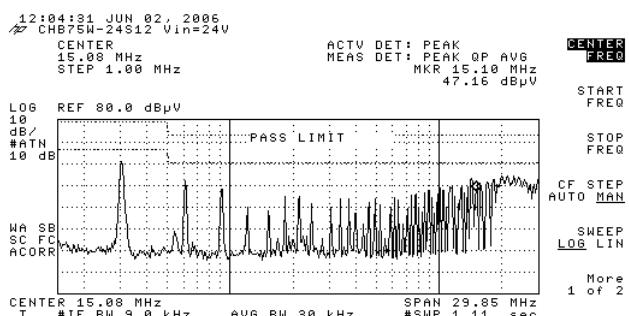


Conducted Class A of PHB75W-24S12

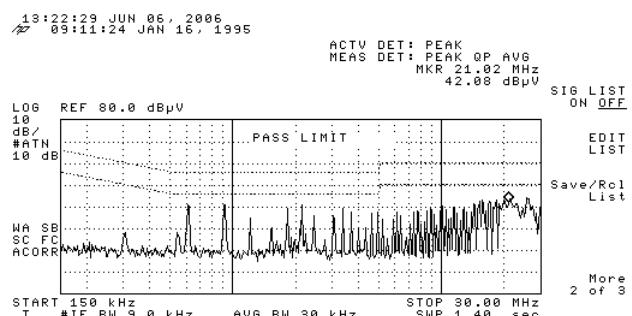

Conducted Class B of PHB75W-24S12

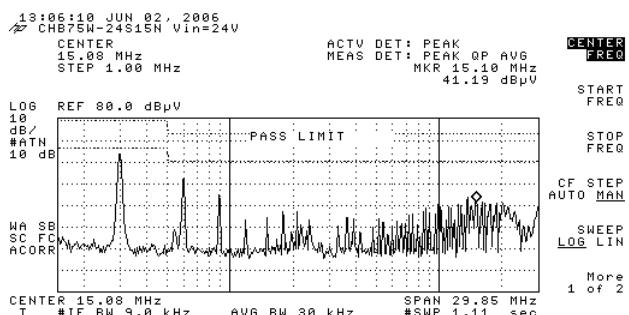


Conducted Class A of PHB75W-24S15

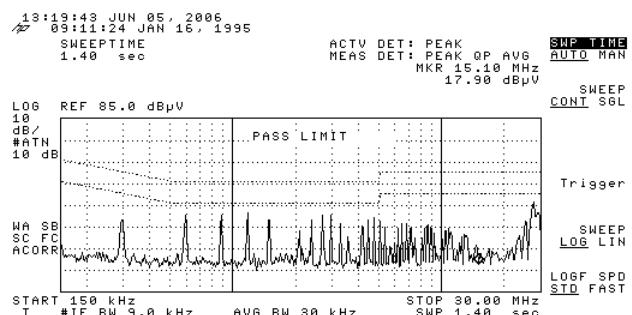


Conducted Class B of PHB75W-24S15


POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

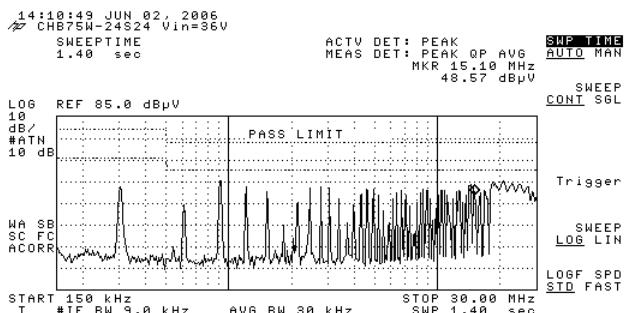


Conducted Class A of PHB75W-24S24

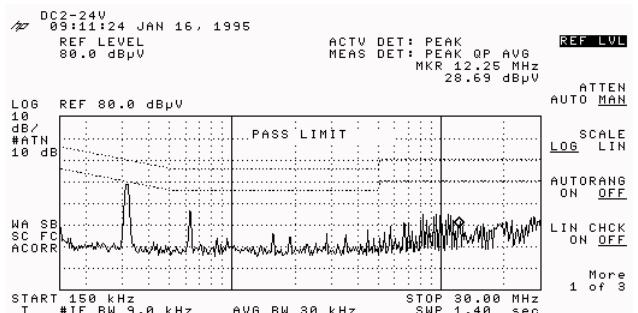


Conducted Class B of PHB75W-24S24

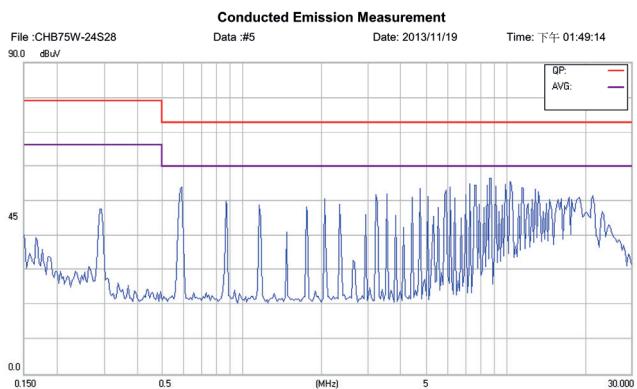


Conducted Class A of PHB75W-24S28

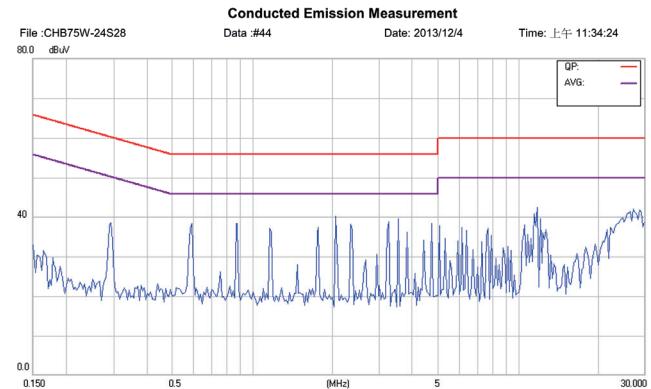


Conducted Class B of PHB75W-24S28

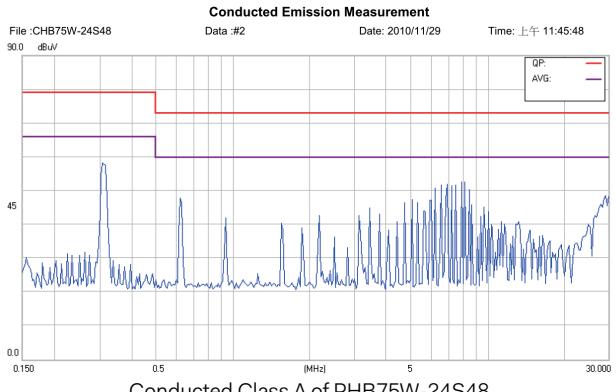


Conducted Class A of PHB75W-24S48

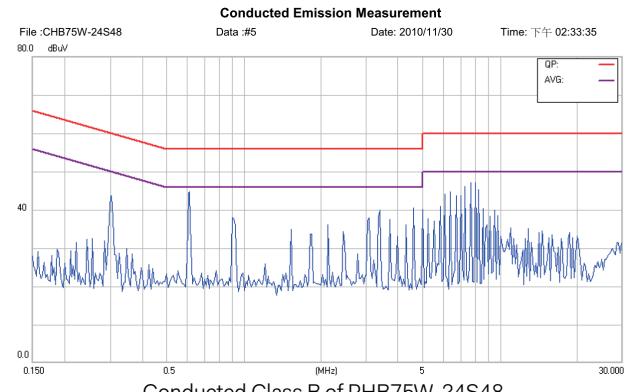

Conducted Class B of PHB75W-24S48

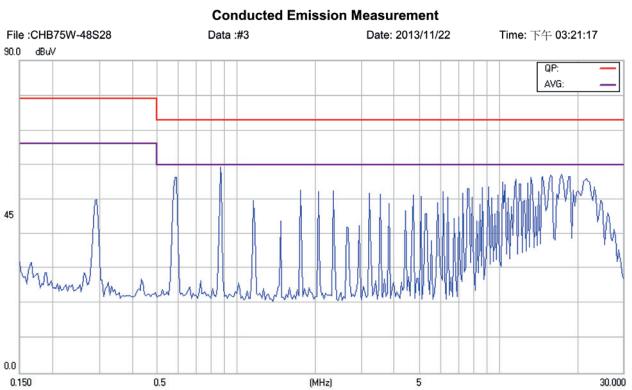


Conducted Class A of PHB75W-48S28

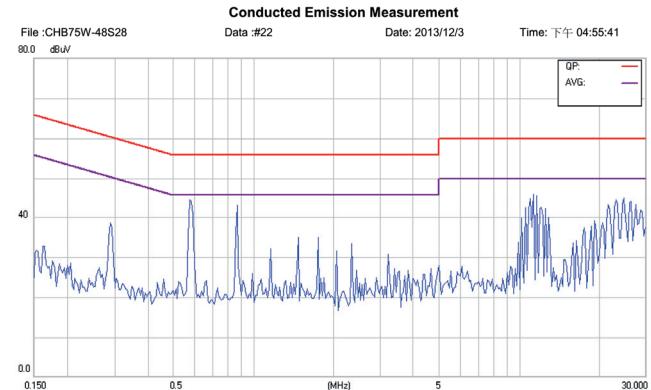


Conducted Class B of PHB75W-48S28

POWERBOX Industrial Line  
PHB75W Series  
49.5-75W 4:1 Single Output  
DC/DC Converter  
Manual V13

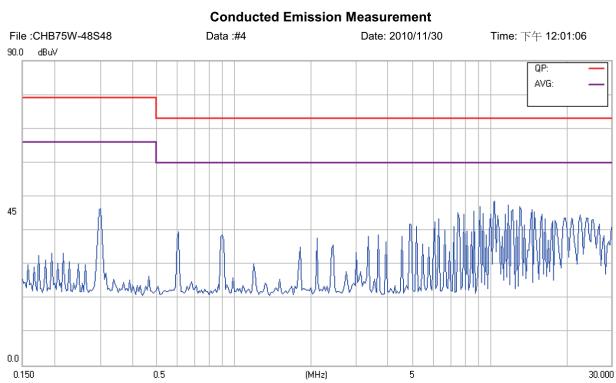

Conducted Class A of PHB75W-48S48

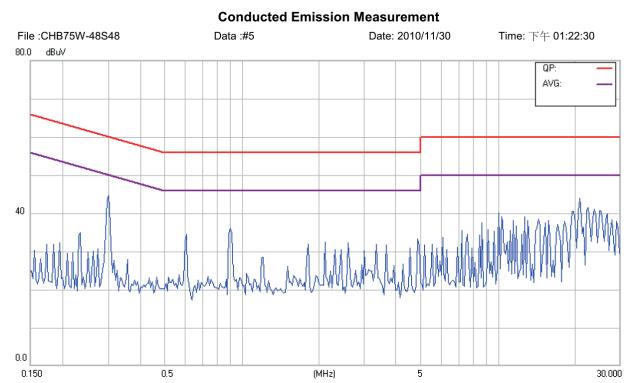

Conducted Class B of PHB75W-48S48

POWERBOX Industrial Line  
 PHB75W Series  
 49.5-75W 4:1 Single Output  
 DC/DC Converter  
 Manual V13

## 8. Part Number

Format: PHB75W - II X OO L-Y

Parameter Symbol	Series PHB75W	Nominal Input Voltage II	Number of Outputs X	Output Voltage OO	Remote ON/OFF Logic L	Option Y
Value	PHB75W	24: 24 Volts 48: 48 Volts	S: Single	33: 3.3 Volts 05: 05 Volts 12: 12 Volts 15: 15 Volts 24: 24 Volts 28: 28 Volts 48: 48 Volts	None: Positive N: Negative	C Clear Mounting Insert (3.2mm DIA)

## 9. Mechanical Specifications

### 9.1 Mechanical Outline Diagrams

All Dimensions In Inches(mm)

Tolerances      Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

